

FIGURE 1

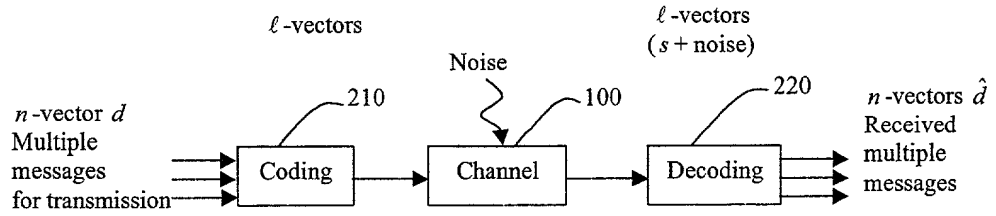


FIGURE 2

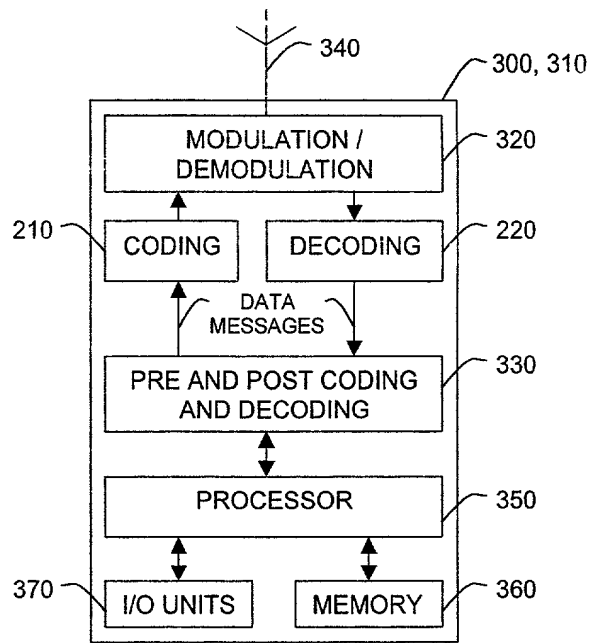


FIGURE 3A

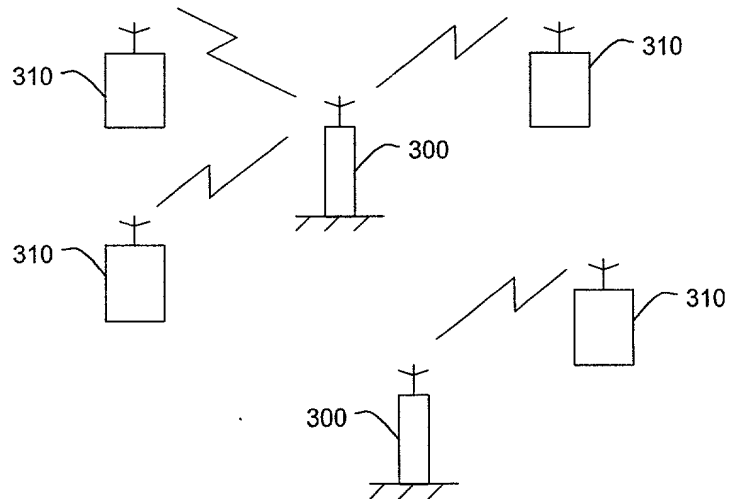


FIGURE 3B

Input

Output

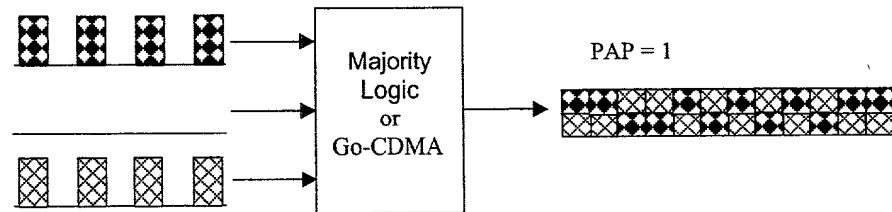
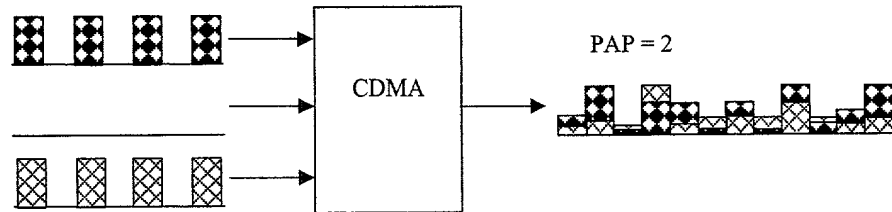
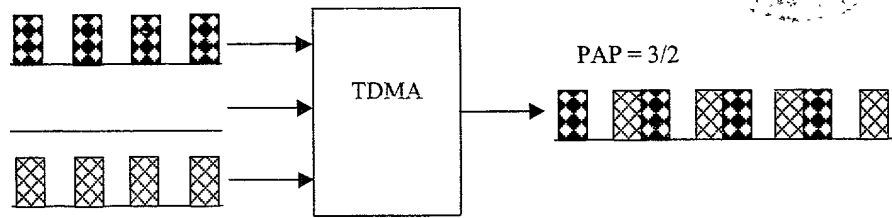


FIGURE 4

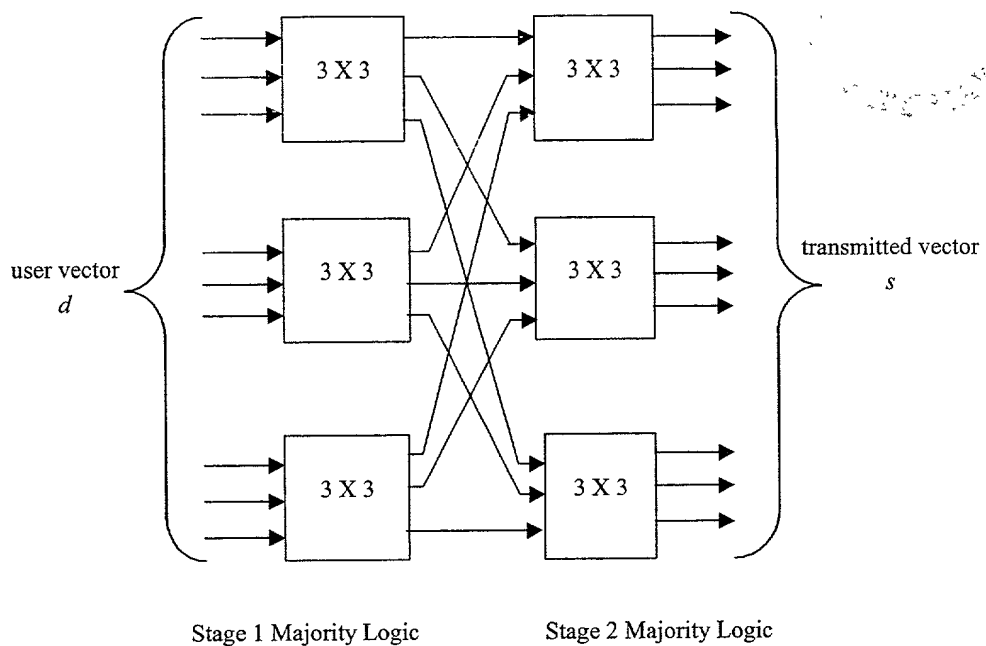


FIGURE 5

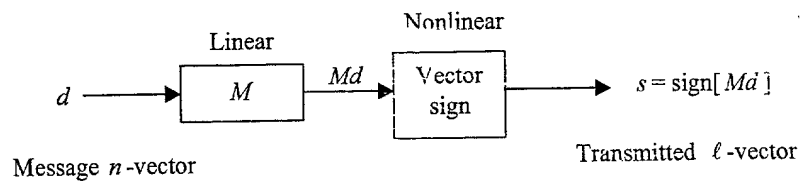


FIGURE 6

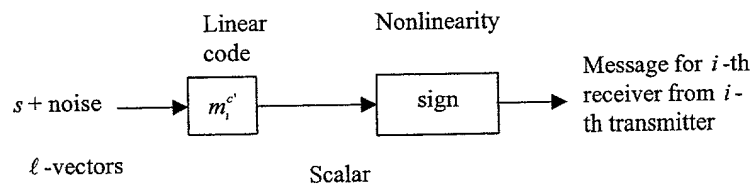


FIGURE 7

0590763 T03237 8904650

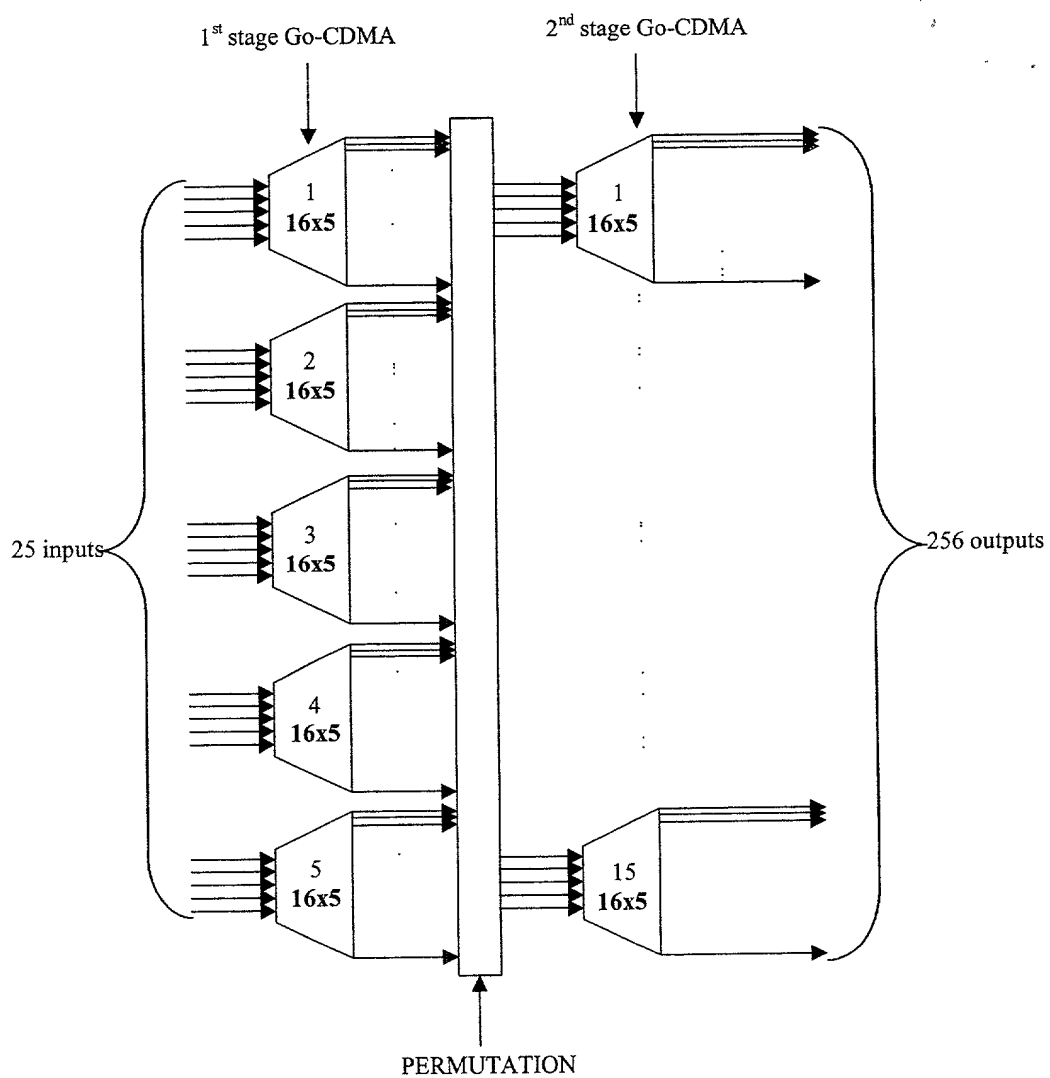


FIGURE 8

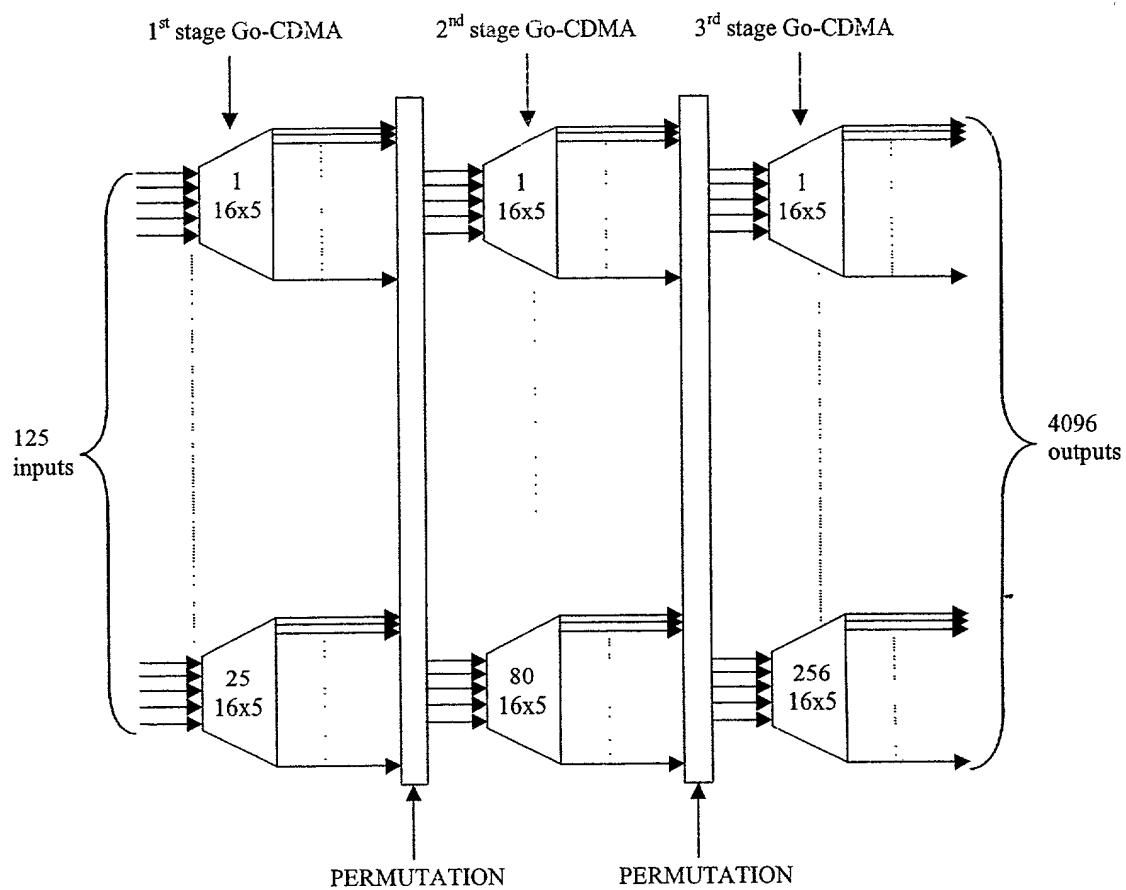


FIGURE 9

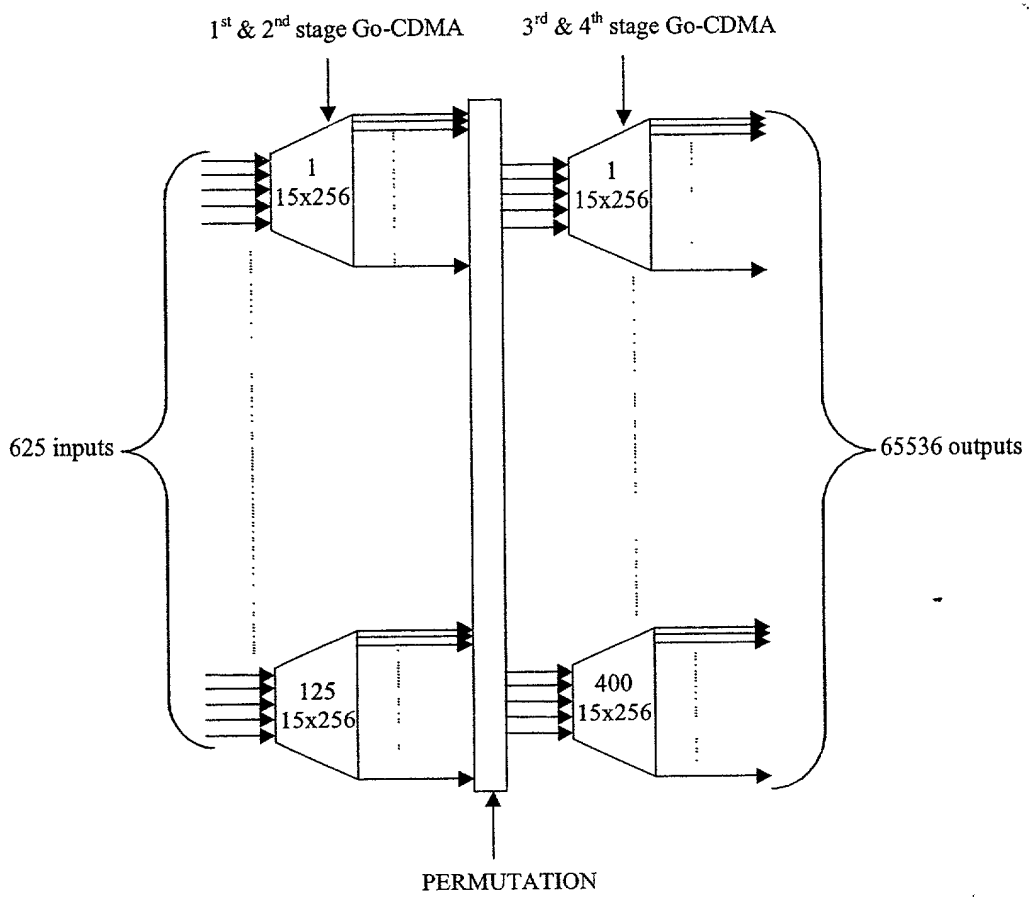


FIGURE 10

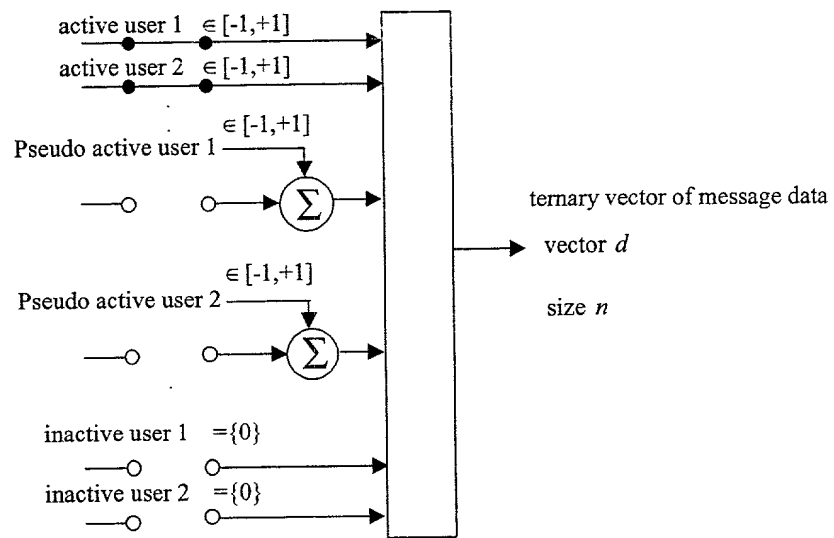


FIGURE 11

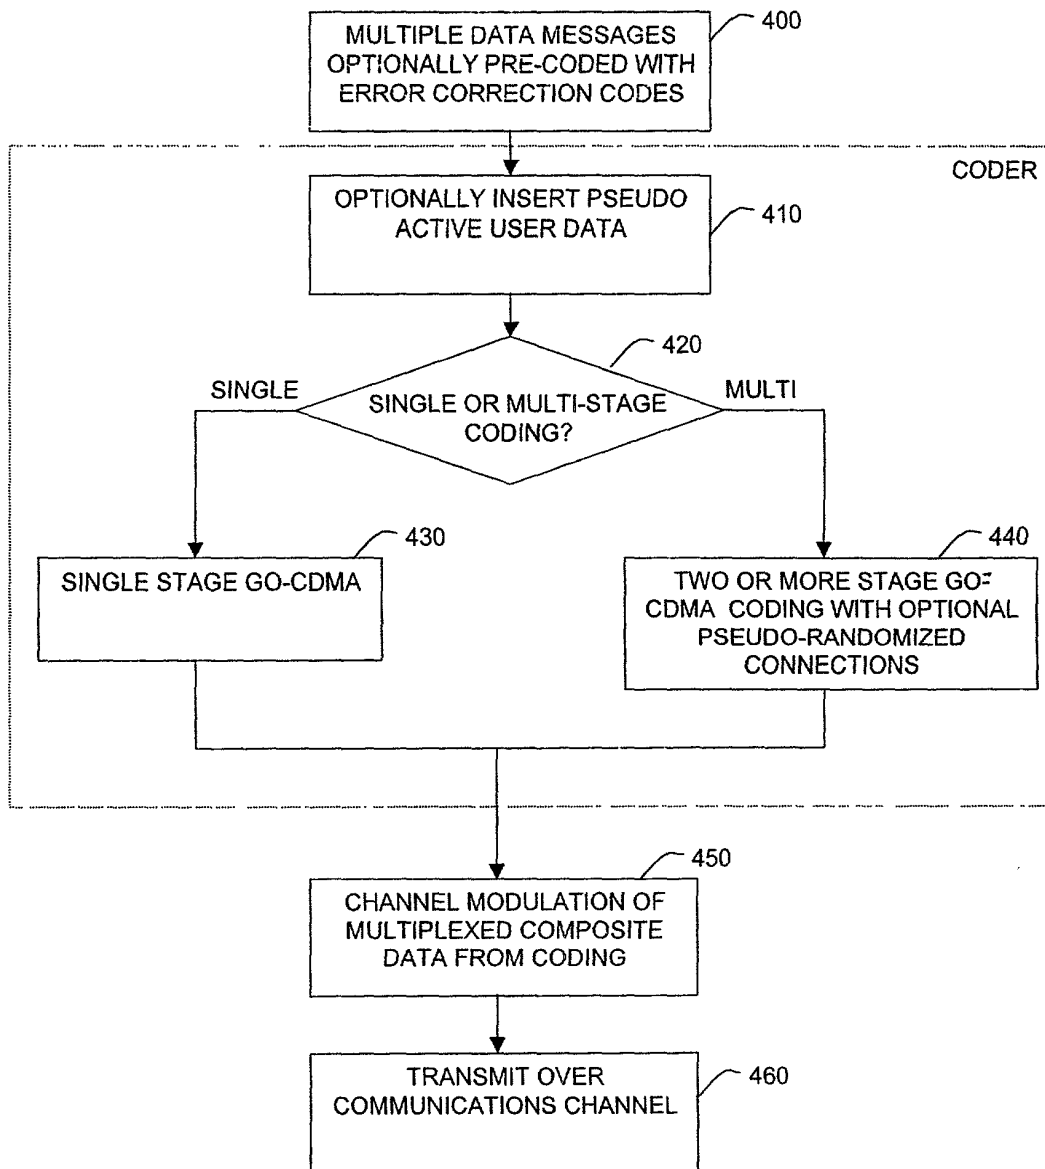


FIGURE 12

RECEIVE MULTIPLEXED
SIGNAL FROM
COMMUNICATION CHANNEL 500

CHANNEL DEMODULATE
SIGNAL TO RECOVER
COMPOSITE DATA 510

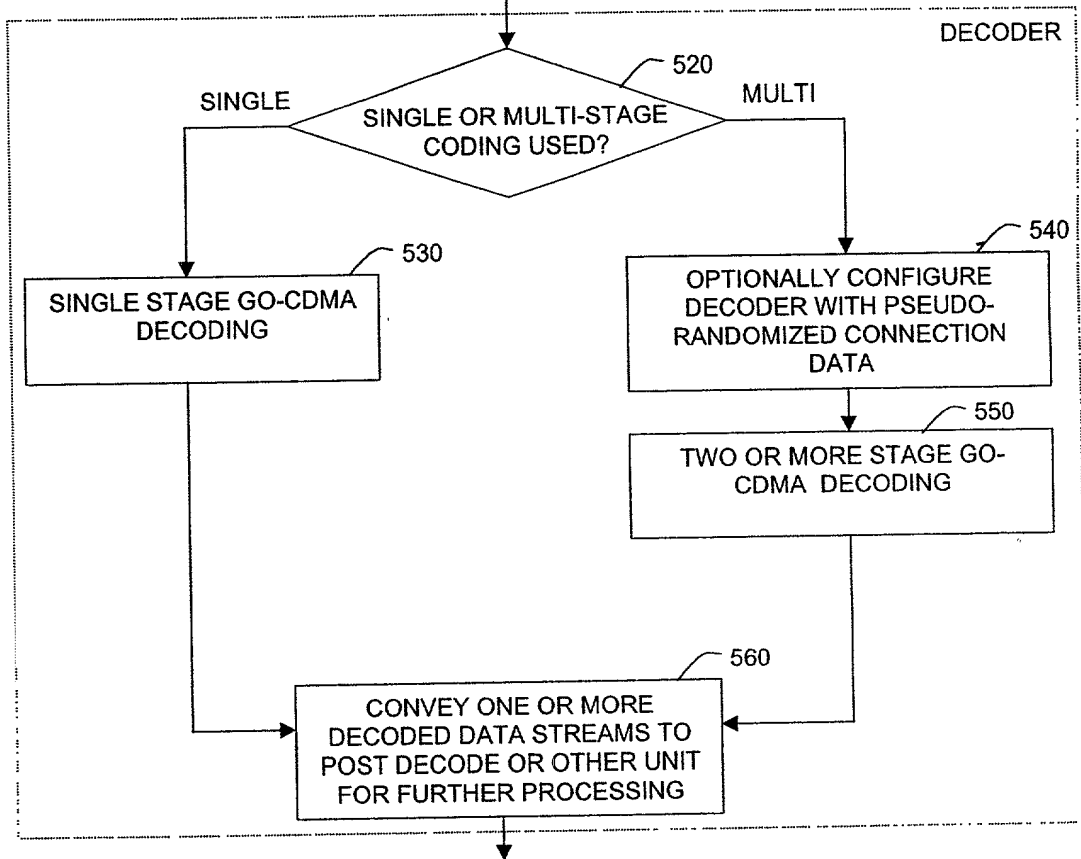


FIGURE 13

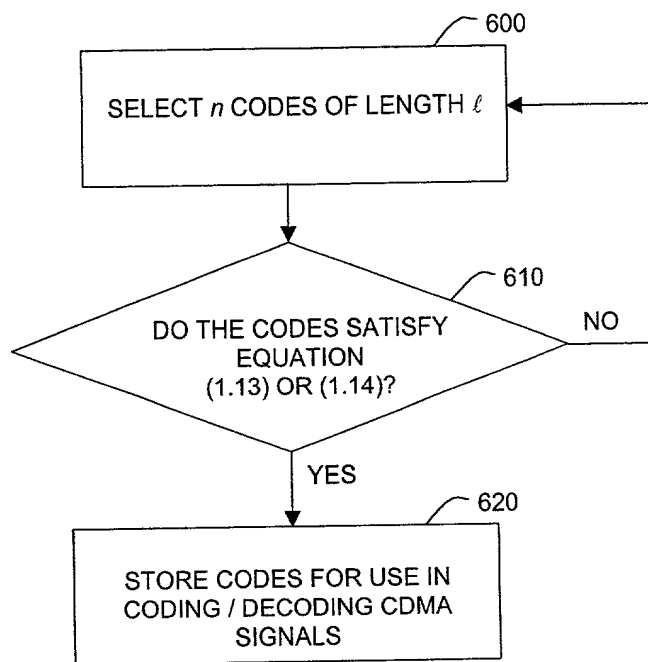


FIGURE 14

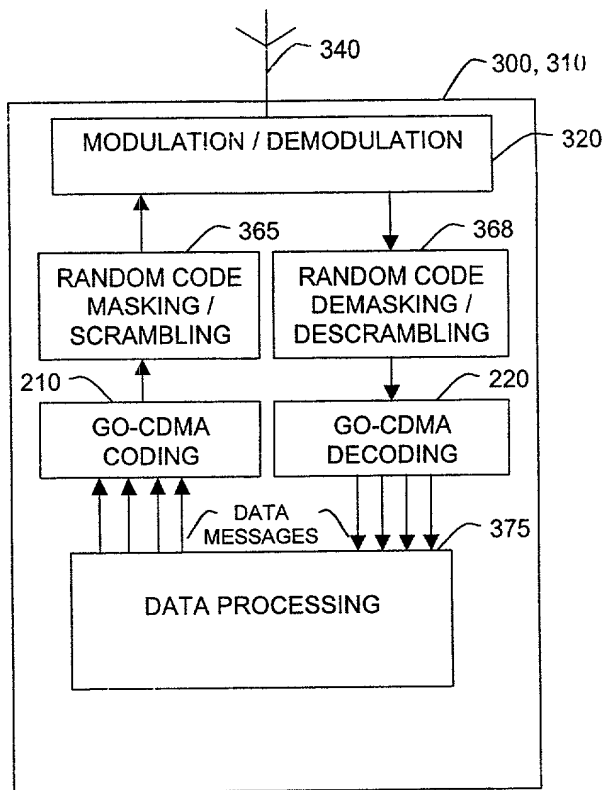


FIGURE 15A

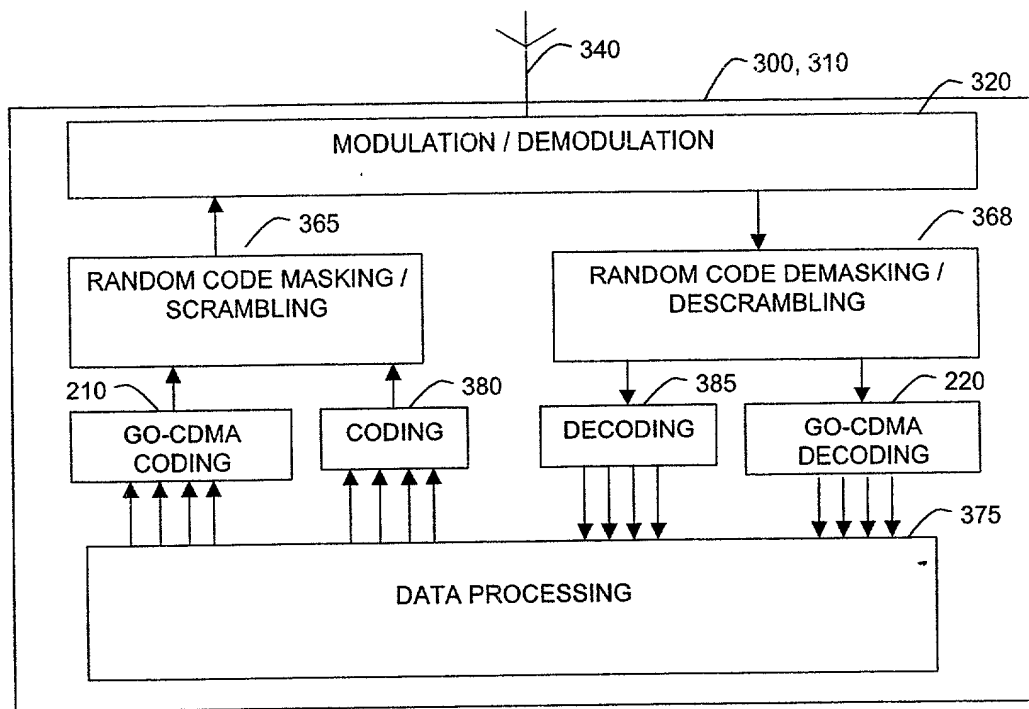


FIGURE 15B